

Figure 1

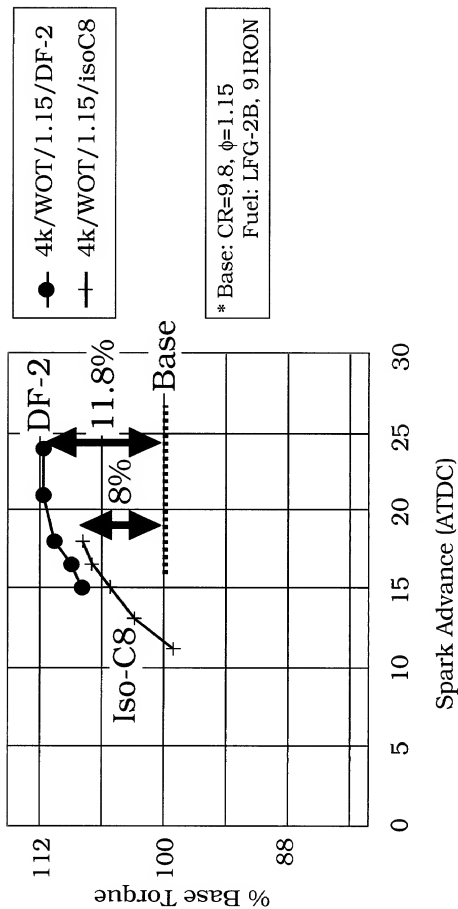


Figure 2

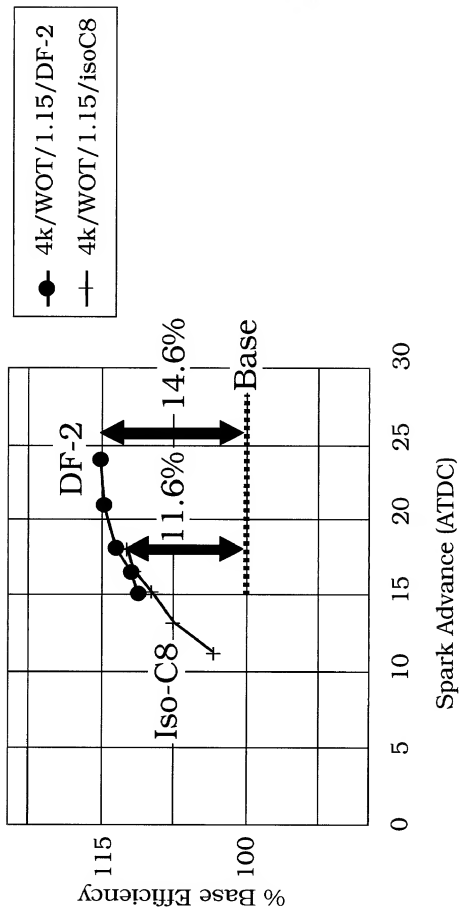


Figure 3

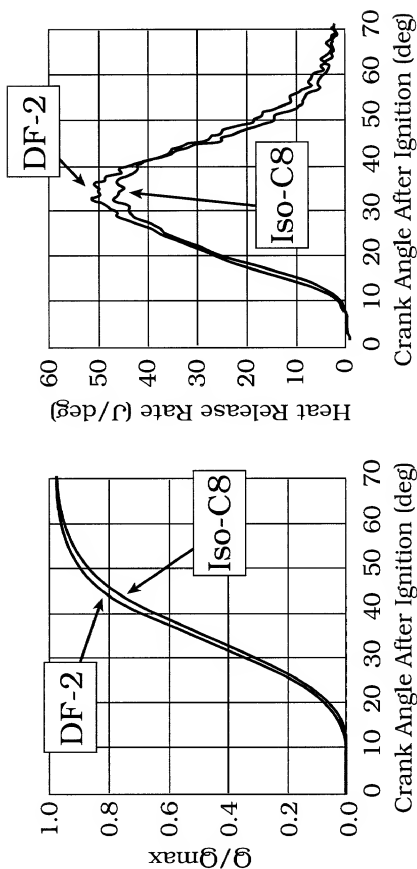


Figure 4

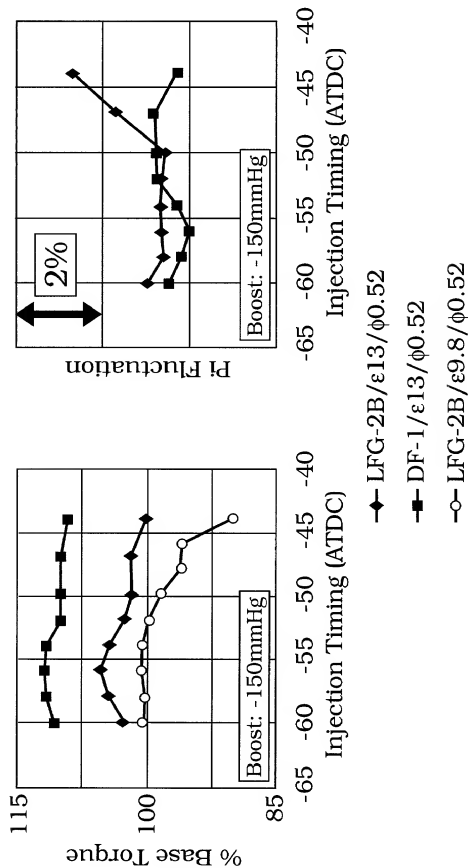


Figure 5

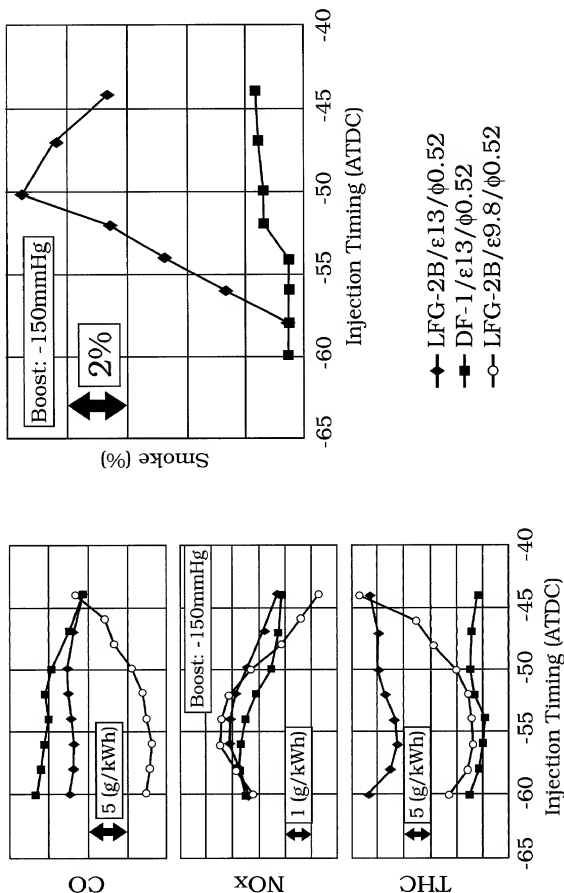


Figure 6

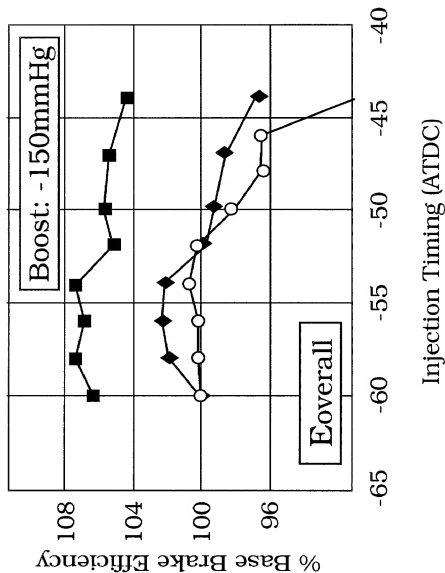


Figure 7

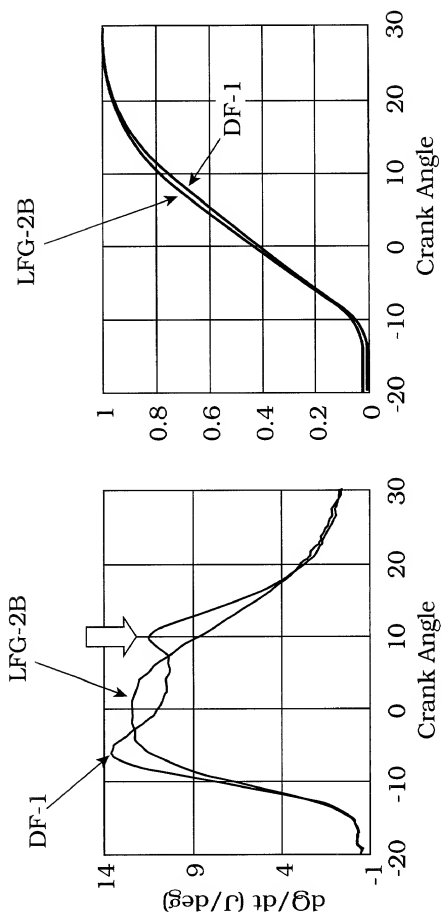


Figure 8


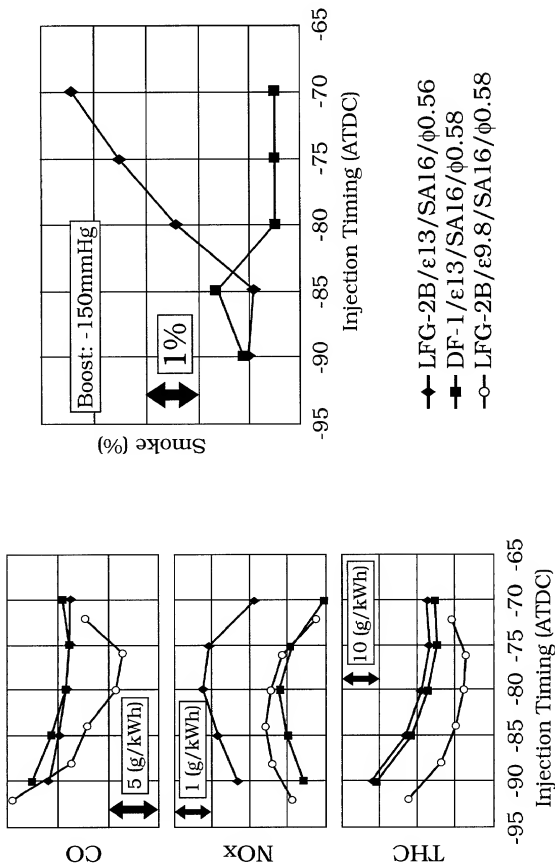


Figure 9

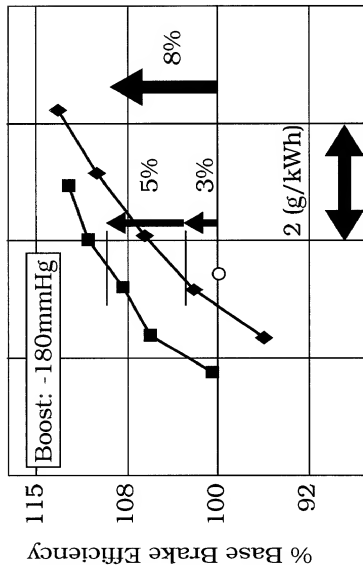

- ◆ LFG-2B/ε13/Inj80/φ0.56
- DF-1/ε13/Inj80/φ0.58
- LFG-2B/ε9.8/Inj80/φ0.58

Figure 10

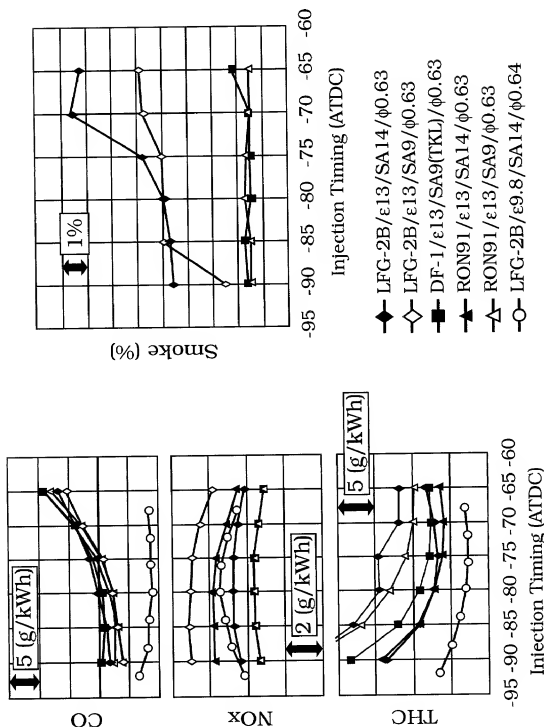


Figure 11


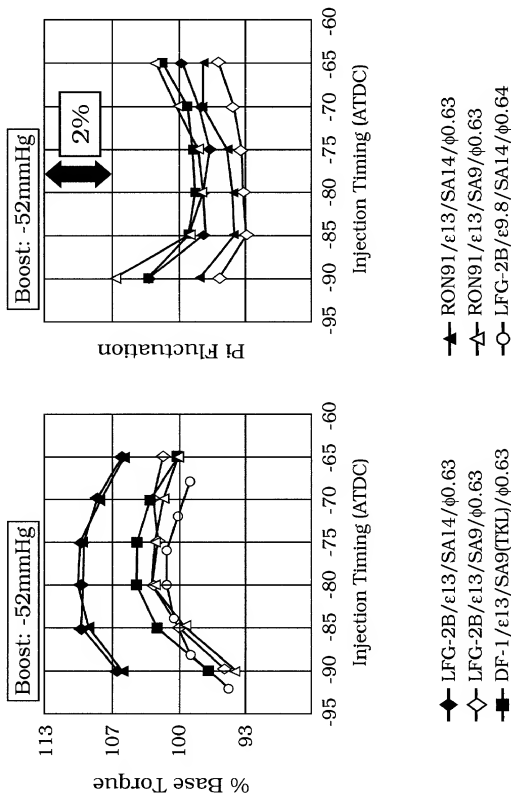


Figure 12

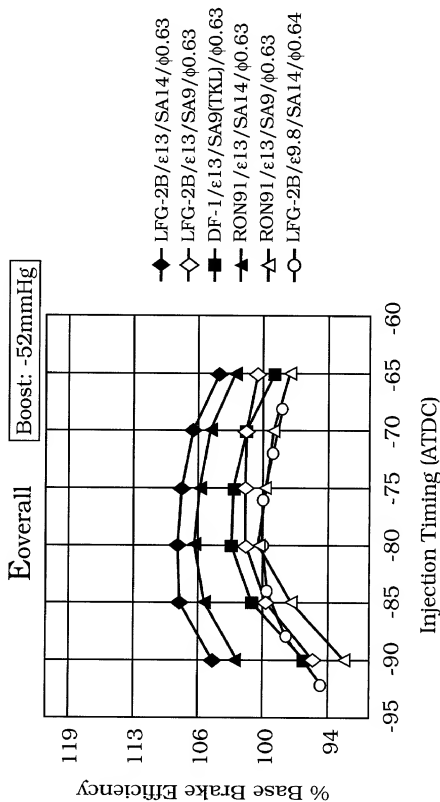

Walter Weissman et al.
09/818,210
Filed: March 27, 2001
TUNING FUEL COMPOSITION FOR
DRIVING CYCLE CONDITIONS IN
SPARK IGNITION